

Gauge Adaptor SMA-20

Direct Gauge Adaptor SMD-20

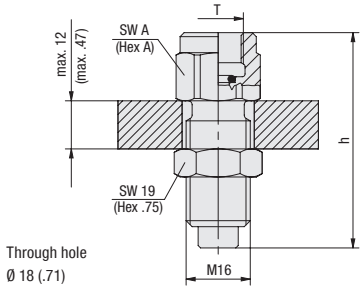

Gauge Adaptor SMA-20



Direct Gauge Adaptor SMD-20





Thread	Dimensions (mm/in)		Weight (kg/lbs) ca.	Ordering Codes (Standard Option)
T	h	Hex A	per 100	
G1/4	54	19	7,20	SMA-20-G1/4-B-OR-W3
	2.13	.75	15.84	
G1/2	64	27	12,40	SMA-20-G1/2-B-OR-W3
	2.52	1.06	27.28	
1/4 NPT	54	19	7,20	SMA-20-1/4NPT-W3
	2.13	.75	15.84	
1/2 NPT	64	27	13,50	SMA-20-1/2NPT-W3
	2.52	1.06	29.70	
7/16–20 UNF	54	19	7,60	SMA-20-7/16UNF-B-W3
	2.16	.75	16.76	
9/16–18 UNF	57	19	7,50	SMA-20-9/16UNF-B-W3
	2.24	.75	16.53	
G1/4	41	19	5,70	SMD-20-G1/4-B-OR-W3
	1.61	.75	12.54	
G1/2	51	27	10,10	SMD-20-G1/2-B-OR-W3
	2.01	1.06	22.22	
1/4 NPT	41	19	5,80	SMD-20-1/4NPT-W3
	1.61	.75	12.76	
1/2 NPT	51	27	10,80	SMD-20-1/2NPT-W3
	2.01	1.06	23.76	
7/16–20 UNF	41	19	6,00	SMD-20-7/16UNF-W3
	1.61	.75	13.20	
9/16–18 UNF	43	19	5,25	SMD-20-9/16UNF-W3
	1.69	.75	11.55	

Ordering Codes

***SMA*-20*-G1/4*-B*-OR*-W3**

* Type	Gauge Adaptor	**SMA**
* Series	STAUFF Test 20 (Connection Thread M16x2)	**-20**
* Thread	acc. to dimension table	**-G1/4**
* Seal Material	NBR (Buna-N®)	**-B**
	FKM (Viton®)	**-V**
	EPDM	**-E**
	Seal Type without O-ring	**none**
* Seal Type	with O-ring	**-OR**
* Material Code	Steel, zinc/nickel-plated	**-W3**
	Stainless Steel V2A - 1.4305 (AISI 303)	**-W4**
	Stainless Steel V4A - 1.4571 (AISI 316 Ti)	**-W5**

Standard option - SMA-20: With Hexagon Lock Nut.
Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.
Snubber on request.

Dimensional drawings: All dimensions in mm (in).