

Ball valve with SAE split flange adapter Steel

BKH / BKHP-SAEFS

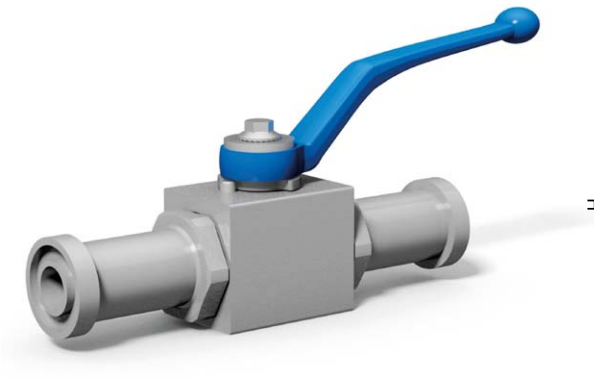

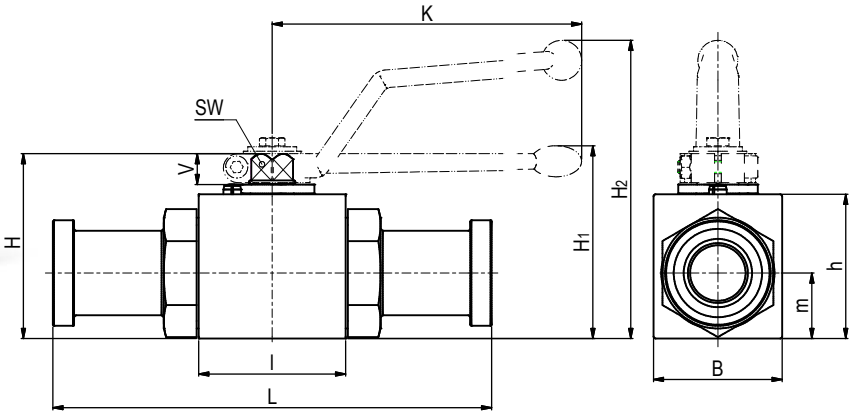

AVAILABLE SIZES

DN13 - DN25 (1/2“ to 1“)

CONNECTIONS

ISO 6162-1, ISO 6162-2

ACCESSORIES ON REQUEST

- Locking devices page 222 - 225
- Actuators 220 - 221
- Mounting holes 17
- Position switches 228 - 229
- Combinations 184 - 186
- Detent on request

MATERIAL CODE DESCRIPTION

Materials	112A	1128
Body	Steel	Steel
Ball	Steel	Steel
Stem	Steel	Steel
Ball seats	POM	POM
O-rings	NBR	FPM
Tmin /Tmax	-20°C / 100°C	-20°C / 100°C

GENERAL DIMENSIONS

Type	l	B	H	h	m	V	SW	K	H_1	H_2	Lever
BKH-DN13	48	35	54	40	19	11	9	115	-	89	Zn
BKH-DN20	62	49	75	57	24,5	14	14	200	79	-	Zn
BKH-DN25	66	58	83	65	29,5	14	14	200	87	-	Zn
BKHP-DN25	74	70	88	70	34,5	14	14	200	92	-	Zn


Please note the pressure ratings of the connection flanges!

Ball valve with SAE split flange adapter Steel

BKH / BKHP-SAEFS

CONNECTION TYPE

ISO 6162-1



DIMENSIONS


Type	LW	L	d +/-0,1	D -0,2	t -0,2	Weight [Kg]
BKH-DN13-SAEFS210	13	151	25,5	30,2	6,8	0,85
BKH-DN20-SAEFS210	19	162	31,9	38,1	6,8	1,87
BKH-DN25-SAEFS210	25	178	39,8	44,4	8,1	2,70
BKH-DN13-SAEFS210 Lu	13	170	25,5	30,2	6,8	
BKH-DN20-SAEFS210 Lu	19	200	31,9	38,1	6,8	
BKH-DN25-SAEFS210 Lu	25	215	39,8	44,4	8,1	

ORDER CODE PER MATERIAL COMBINATION

PN [bar]	112A	1128
350	30739	25937
350	20048	25938
320	30740	15737
350	on request	
350	on request	
320	on request	

CONNECTION TYPE

ISO 6162-2



DIMENSIONS


Type	LW	L	d +/-0,1	D -0,2	t -0,2	Weight [Kg]
BKH-DN13-SAEFS420	13	151	25,5	31,8	7,9	0,90
BKH-DN20-SAEFS420	19	174	31,9	41,3	8,9	1,99
BKH-DN25-SAEFS420	25	198	39,8	47,6	9,6	3,00
BKHP-DN25-SAEFS420	25	206	39,8	47,6	9,6	3,66
BKH-DN13-SAEFS420 Lu	13	180	25,5	31,8	7,9	
BKH-DN20-SAEFS420 Lu	19	200	31,9	41,3	8,9	
BKH-DN25-SAEFS420 Lu	25	250	39,8	47,6	9,6	
BKHP-DN25-SAEFS420 Lu	25	258	39,8	47,6	9,6	


ORDER CODE PER MATERIAL COMBINATION

PN [bar]	112A	1128
420	24818	25693
420	24819	25939
350	09913	15722
420	43630	44031
420	on request	
420	on request	
350	on request	
420	on request	

Ball valve with SAE split flange adapter Stainless Steel

BKH / BKHP-SAEFS

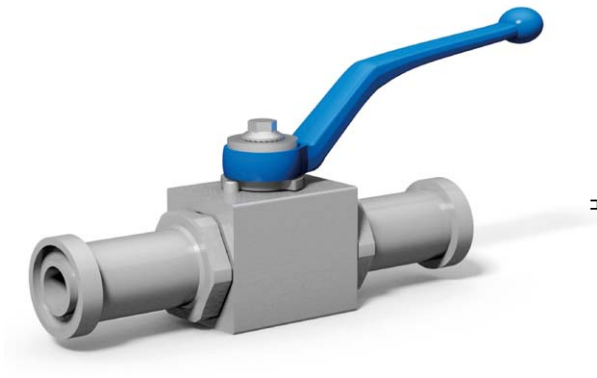

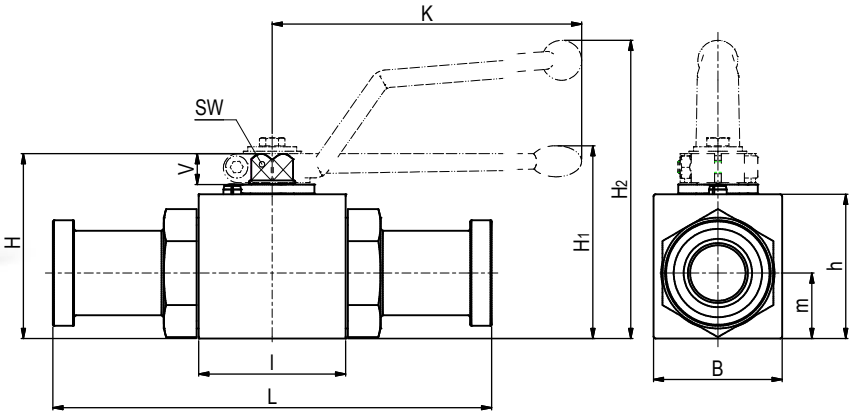

AVAILABLE SIZES

DN13 - DN25 (1/2“ to 1“)

CONNECTIONS

ISO 6162-1, ISO 6162-2

ACCESSORIES ON REQUEST

- Locking devices page 222 - 225
- Actuators 220 - 221
- Mounting holes 17
- Position switches 228 - 229
- Combinations 184 - 186
- Detent on request

MATERIAL CODE DESCRIPTION

Materials	442A	4428
Body	Stainless Steel	Stainless Steel
Ball	Stainless Steel	Stainless Steel
Stem	Stainless Steel	Stainless Steel
Ball seats	POM	POM
O-rings	NBR	FPM
Tmin /Tmax	-30°C / 100°C	-20°C / 100°C

GENERAL DIMENSIONS

Type	l	B	H	h	m	V	SW	K	H_1	H_2	Lever
BKH-DN13	48	35	54	40	19	11	9	115	-	89	Zn
BKH-DN20	62	49	75	57	24,5	14	14	200	79	-	Zn
BKHP-DN20	82	58	83	65	32,5	14	14	200	87	-	Zn
BKH-DN25	66	58	83	65	29,5	14	14	200	87	-	Zn
BKHP-DN25	84	70	88	70	34,5	14	14	200	92	-	Zn


Please note the pressure ratings of the connection flanges!

Ball valve with SAE split flange adapter Stainless Steel

BKH / BKHP-SAEFS

CONNECTION TYPE

ISO 6162-1



DIMENSIONS


Type	LW	L	$d^{+/-0,1}$	$D_{-0,2}$	$t_{-0,2}$	Weight [Kg]
BKH-DN13-SAEFS210	13	151	25,5	30,2	6,8	0,85
BKH-DN20-SAEFS210	19	162	31,9	38,1	6,8	1,87
BKHP-DN20-SAEFS210	19	182	31,9	38,1	6,8	
BKH-DN25-SAEFS210	25	178	39,8	44,4	8,1	2,70
BKH-DN13-SAEFS210 Lu	13	170	25,5	30,2	6,8	
BKH-DN20-SAEFS210 Lu	19	200	31,9	38,1	6,8	
BKHP-DN20-SAEFS210 Lu	19	220	31,9	38,1	6,8	
BKH-DN25-SAEFS210 Lu	25	215	39,8	44,4	8,1	

ORDER CODE PER MATERIAL COMBINATION

PN [bar]	442A	4428
350	37611	37614
350	37612	37615
350	on request	
320	37613	37616
350	on request	
350	on request	
350	on request	
320	on request	

CONNECTION TYPE

ISO 6162-2



DIMENSIONS

Type	LW	L	$d^{+/-0,1}$	$D_{-0,2}$	$t_{-0,2}$	Weight [Kg]
BKH-DN13-SAEFS420	13	151	25,5	31,8	7,9	0,90
BKH-DN20-SAEFS420	19	174	31,9	41,3	8,9	1,99
BKHP-DN20-SAEFS420	19	194	31,9	41,3	8,9	2,85
BKH-DN25-SAEFS420	25	198	39,8	47,6	9,6	3,00
BKHP-DN25-SAEFS420	25	215	39,8	47,6	9,6	4,19
BKH-DN13-SAEFS420 Lu	13	180	25,5	31,8	7,9	
BKH-DN20-SAEFS420 Lu	19	200	31,9	41,3	8,9	
BKHP-DN20-SAEFS420 Lu	19	220	31,9	41,3	8,9	
BKH-DN25-SAEFS420 Lu	25	250	39,8	47,6	9,6	
BKHP-DN25-SAEFS420 Lu	25	267	39,8	47,6	9,6	

ORDER CODE PER MATERIAL COMBINATION

PN [bar]	442A	4428
420	33255	37617
350	30510	37618
420	53475	53476
350	31554	37619
420	53477	53478
420	on request	
350	on request	
420	on request	
350	on request	
420	on request	